

ProFace X [TI]

Face & Palm Verification and Thermal Imaging Temperature Detection Terminal



0.1s High Speed
Temperature Detection



Up to 120cm
Measurement Distance



Touchless for
Better Hygiene



Temperature
Detection



Masked Face

ZK BioSecurity



ProFace X [TI] is a fully upgraded version of the ProFace product line, which is designed to deal with all kinds of scenarios. Powered by the ZKTeco-customized CPU for running the intellectualized engineering facial recognition algorithm and the latest computer vision technology, ProFace X [TI] supports both facial and palm verification with large capacity and rapid recognition speed, boosting the security performance in all aspects.

ProFace X [TI] also helps eliminate hygiene concerns; not only because of the contactless recognition technology it is equipped with, but also because of the new functions namely body temperature detection and masked individual identification.

The facial recognition capability has reached a new height in the biometrics technology industry with a maximum of 50,000 facial templates, recognition speed of less than 0.3 sec per face, and ultimate anti-spoofing ability against almost all types of fake photos and videos attack.

In addition, the 3-in-1 palm recognition (Palm Shape, Palm Print and Palm Vein) is performed in 0.35 sec per hand; the palm data acquired will be compared with a maximum of 5,000 palm templates.

As mentioned above, ProFace X [TI] can assist in reducing the risk of infection and germs spreading during the recent global public health issue as well. The enables fast and accurate body temperature measurement and masked individual identification during facial and palm verification at all access points, especially in hospitals, factories, schools, commercial buildings, airports, stations, and other public areas.

Features

- Ultra-large capacity of facial templates for 1:N verification: 30,000 (standard); max. 50,000 (optional)
- Huge capacity of palm templates; 1:N - 5,000 palm templates
- Anti-spoofing algorithm against print attack (laser, color and B/W photos), videos attack, and 3D mask attack
- Intelligent energy-saving design; precisely evaluation of the distance (up to 2.5m (8.2ft)) between the user and the device by a microwave detector before waking up the recognition terminal
- 2MP starlight CMOS sensor camera with WDR function
- 8" touch screen with 400 lux, which offers high visibility under strong and direct light
- Wide range of working temperature (16°C ~ 35°C; 60.8°F ~ 95°F)
- 0.1s High Speed Temperature Detection, measurement distance of 30 – 120cm
- Temperature Measurement Accuracy: $\pm 0.3^{\circ}\text{C}$ ($\pm 0.54^{\circ}\text{F}$), tested in a distance of 80cm (2.63ft) under 25°C (77°F) environment
- Mask detection; facial verification available with masks

* Facial verification for masked individuals will increase FAR. Palm verification for masked individuals is recommended. Temperature measurement data is for reference only, not for medical use. ProFace X [TI] is available for indoor environments without wind or direct sunlight.

Specifications (GL Exclusive Feature)

Capacity

| | |
|--------------|---------------------|
| Faces | 30,000 (1:N) |
| | 50,000 (Optional) |
| Palm | 5,000 (1:N) |
| Users | 50,000 |
| Transactions | 1,000,000 |
| | 2,000,000(Optional) |
| User Photos | 30,000 |
| Event Photos | 10,000 |

Compatibility

Security Relay Box
Wiegand / RS485 / RS232 Slave Reader
with FP / Barcode / QR-code
ZKBioSecurity and ZKBioAccess Software

Hardware

- 900MHz Dual Core Customized AI CPU
- 512MB RAM / 8G Flash
- 8" High light (400lux) IPS Touch LCD
- 2MP WDR Low Light Camera
- Adjustable Light brightness LED
- Hi-Fi Voice
- High Sensitivity Microphone
- Distance Detection Sensor
- Reset Button and Tamper Switch

Access Control Interface

Lock Relay Output
Alarm Output / Auxiliary Input
Exit Button / Door Sensor

Special Functions

- 0.3s High Speed Facial Verification
- Liveness Detection
- HTTPS Communication Encryption (Optional)
- Event Snapshot

Standard Functions:

Access Levels, Groups, Holidays, DST,
Duress Mode (Password), Anti-Passback,
Record Query, Tamper Switch Alarm,
Custom Wallpaper & Screen Saver

Preventative Measures

Mask detection
Body temperature detection
Temperature Measurement Distance:
30cm~120cm (0.98ft~3.94ft)
Temperature Measurement Accuracy: $\pm 0.3^{\circ}\text{C}$
Temperature Measurement Range: $20^{\circ}\text{C}\sim 50^{\circ}\text{C}$
($68^{\circ}\text{F}\sim 122^{\circ}\text{F}$)

Communication

TCP/IP
Wiegand Input / Output
Wi-Fi (Optional)
RS485 / RS232



Additional Info

Face Algorithm: ZKLiveFace5.8
Palm: FAR $\leq 0.01\%$; FRR $\leq 1\%$
Working Temperature: $16^{\circ}\text{C}\sim 35^{\circ}\text{C}$,
($60.8^{\circ}\text{F}\sim 95^{\circ}\text{F}$)
Working Humidity: $\leq 93\%$
Storage Temperature: $-40^{\circ}\text{C}\sim 65^{\circ}\text{C}$
($-40^{\circ}\text{F}\sim 149^{\circ}\text{F}$)
Net Weight: 853g
Dimensions (H*L*D): 279*143*27mm

Power

Operating Voltage: 12V DC
Current Draw: $< 2,000\text{mA}$

Configuration

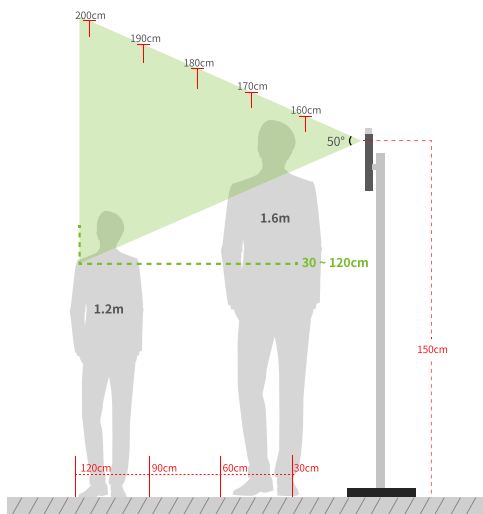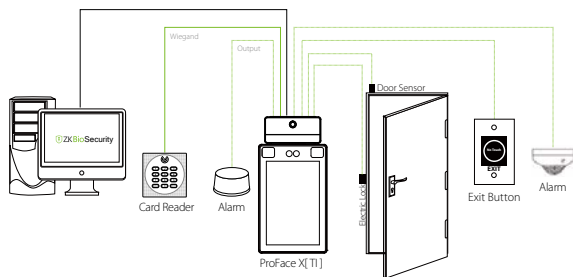

Recommended installation height: 150cm
Temperature Measurement Distance: 30cm~120cm

Dimensions (mm)

