


DATA SHEET

SMA 4G antenna 174Black-L3000



MS
Seguridad

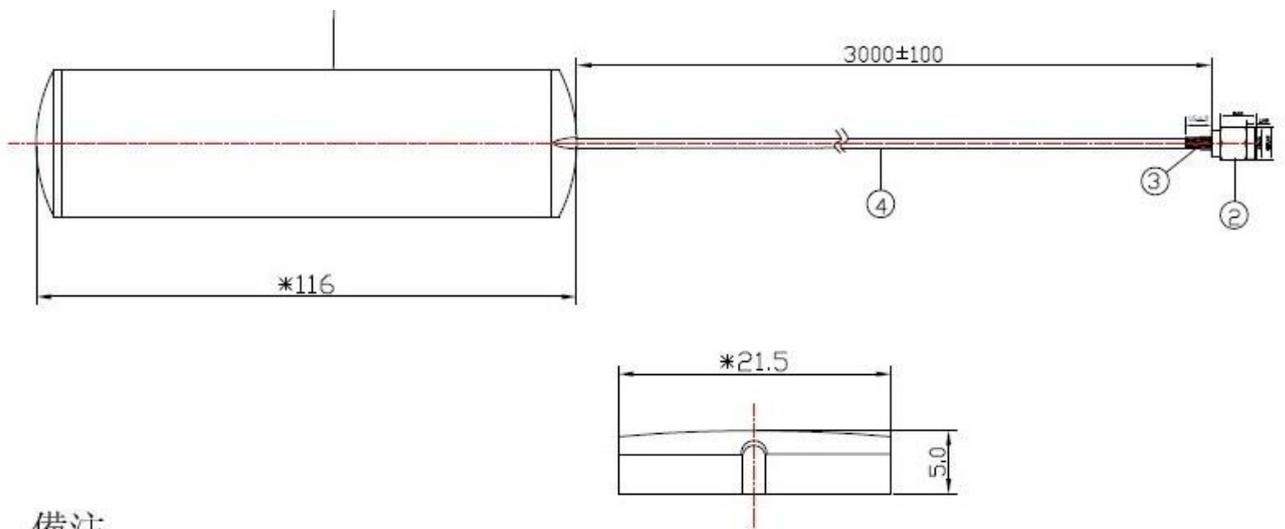





备注

Electrical Specifications



Frequency Range	700–2700MHz
VSWR	≤1.5
Input Impedance	50 Ω
Gain	3.0dBi
H-plane Beam Width	360°
E-plane Beam Width	78–100°
Maximum Input Power	50W

Mechanical Specifications


Antenna Color	Black
Input connector	SMA Or other
Radiator Material	Copper
Cable length	1.5M Or other
Working Temperature	-20°C ~+85°C
Working Humidity	-20~80%

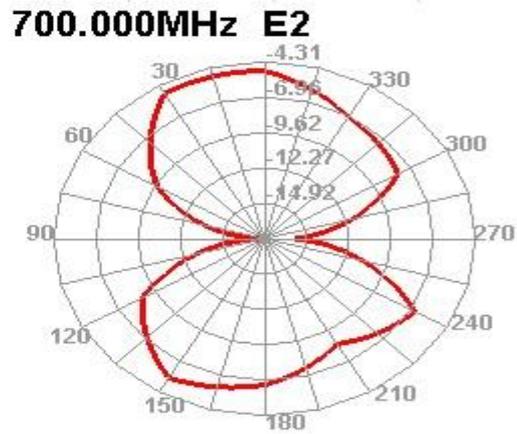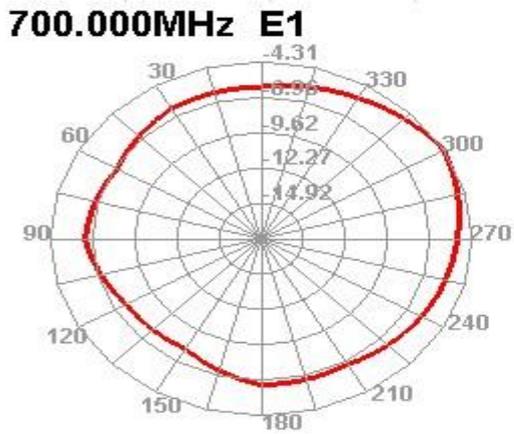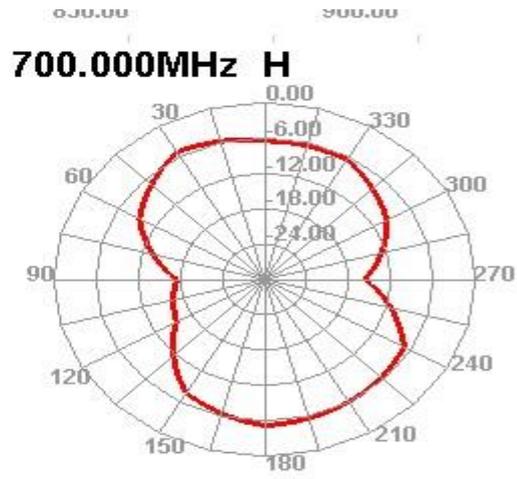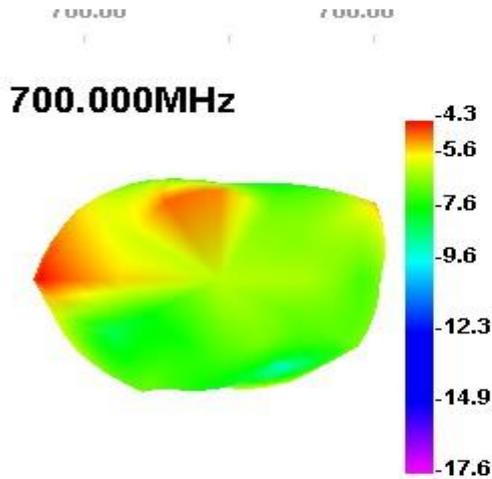


1720.000MHz

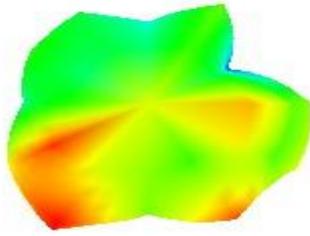


1720.000MHz H

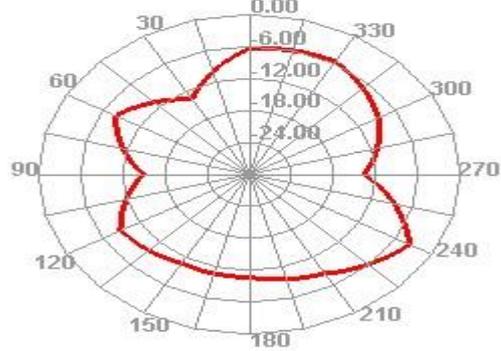


1720.000MHz E1

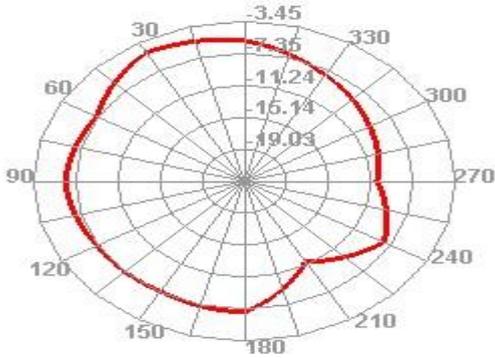


1720.000MHz E2

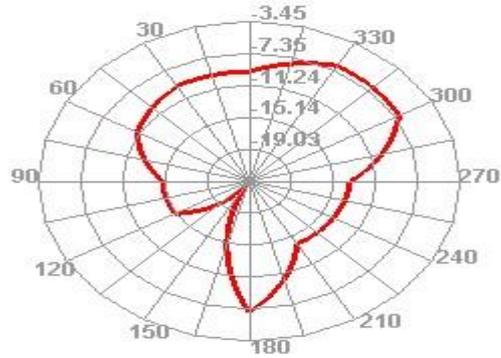


1710.00MHz - 2690.00MHz Gain

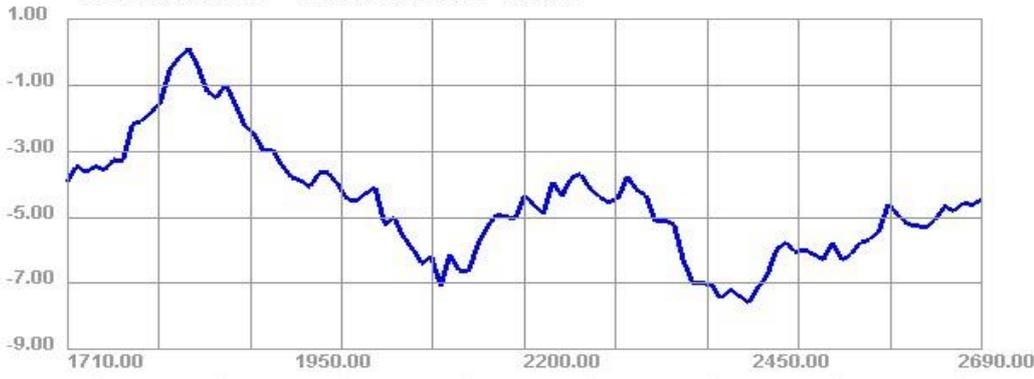

1710.00MHz - 2690.00MHz Efficiency

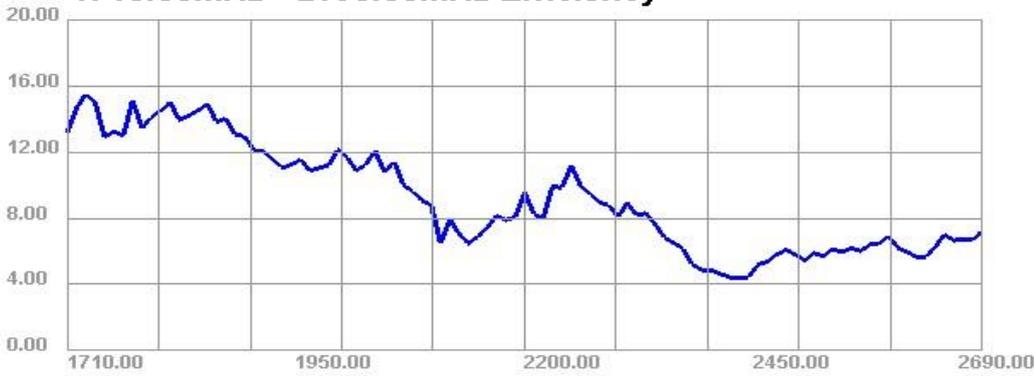

700.00MHz - 960.00MHz Gain

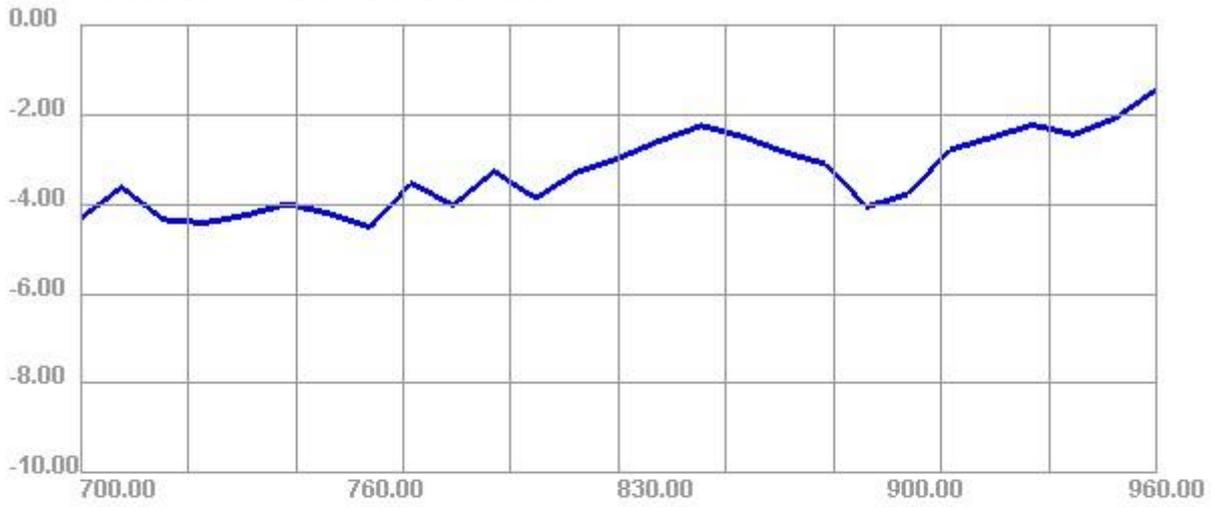

700.00MHz - 960.00MHz Efficiency

