

## Features

- A centralized and integrated graphical interface between operators and monitored buildings
- Customizable for enhanced site representation
- Custom event messaging to complement and enhance site fire alarm plan
- Custom color graphical icons depict addressable devices / objects
- Extensive event logging with status notations for report customization
- Upload configuration files without taking the whole system off-line
- Easy controls allow operators to precisely navigate between buildings and floors for rapid surveillance
- Multiple import formats are supported

## Description

### Award-winning Building Management System

Open Graphic Navigator (OpenGN) is a centralized fire alarm management system that provides building or campus monitoring. As a powerful integration tool, OpenGN allows operators to monitor remote sites from multiple workstations located anywhere in the world.

### 3D Visualization

OpenGN displays monitored buildings and campuses in both 2D and 3D representations. Mircom's Engineering Services offers customized graphic services for an unrivaled and unique graphical interface. Outdated LED ladder graphics are no longer required, replace with a widescreen monitor and OpenGN for a modern and upscale experience.

### Flexible, Scalable & Customizable

The modular architecture of OpenGN allows for a flexible, scalable and customized solution. Enterprise level homogenous (Mircom technology) and heterogeneous (3rd party technology) solutions are possible with OpenGN.

### Leading Edge Reporting

"Take Action" messages provide operators and first responders with specific, real-time information about site events including notes about hazardous materials, vulnerable building occupants, and management contacts. Real-time reports of all events are compiled, exactly as they occur. With these reports and records, operators can reconstruct emergency events after the fact, both to verify that the proper steps were taken, and to improve future responses.

## System Requirements

### Recommended Computer Specifications

#### OGN-TWR-STD (e.g. Non-UL/ULC Hardware Appliance)


- Intel Xeon Bronze 3106, Octa-core, 16GB RAM, 256GB SSD, 2TB HDD
- NVIDIA Quadro P1000 4GB
- Windows 10 IoT 2019 Enterprise LTSC
- SQL Server 2017 Standard

#### OGN-UL-STD (e.g. UL/ULC Hardware Appliance)

- Intel Xeon E5-2609v4, Octa-core, 16GB RAM, 2TB HDD
- Matrox C680 4G
- Windows 10 IoT 2019 Enterprise LTSC
- SQL Server 2017 Standard



## Network Diagram

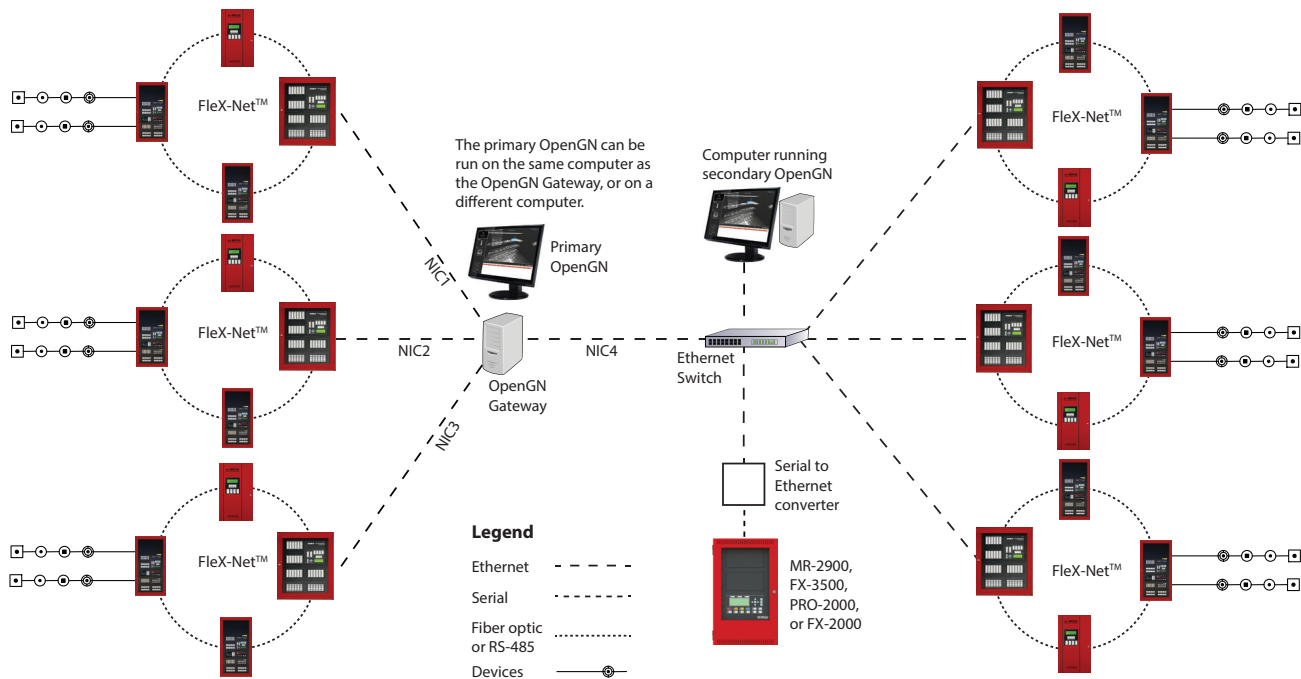

## Ordering Information

| Model           | Description  |
|-----------------|--|
| OGN-FLSLIC-ONE  | Single Fire Alarm Control Panel License (Price per connection)<br>Requires: OGN-KEY (sold separately) Contact us for non-Mircom panel connections                |
| OGN-FLSLIC-EXP  | Fire Alarm Control Panel License for 2-9 Connections (Price per connection)<br>Requires: OGN-KEY(sold separately) Contact us for non-Mircom panel connections    |
| OGN-FLSLIC-STD  | Fire Alarm Control Panel License for 10-99 Connections (Price per connection)<br>Requires: OGN-KEY (sold separately) Contact us for non-Mircom panel connections |
| OGN-FLSLIC-ENT  | Fire Alarm Control Panel License for 100+ Connections (Price per connection)<br>Requires: OGN-KEY (sold separately) Contact us for non-Mircom panel connections  |
| OGN-KEY         | OGN License Key Stick  |
| OGN-UL-STD      | Industrial Rack Appliance /w UL/ULC Certification  |
| OGN-TWR-STD     | Industrial Tower/Rack Appliance /w Long Life & Stability   |
| 51-15063-001    | 22" Class Wide Desktop Monitor UL864 / ULC-S527-11 / UL 2572 Recognized LED Backlit (Monitor for OGN-UL-STD)   |
| ARW-VESP211-KIT | 1-port Ethernet Serial Server Kit  |
| ARW-2525-KIT    | Industrial 5-PORT Unmanaged POE Switch Kit.<br>Kit includes: 1 X 5-PORT Unmanaged POE Switch and 1 X 75W 48 VDC power supply                                     |



**Canada**  
25 Interchange Way  
Vaughan, Ontario L4K 5W3  
Telephone: (905) 660-4655  
Fax: (905) 660-4113

**U.S.A.**  
4575 Witmer Industrial Estates  
Niagara Falls, NY 14305  
Toll Free: (888) 660-4655  
Fax Toll Free: (888) 660-4113



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness.