


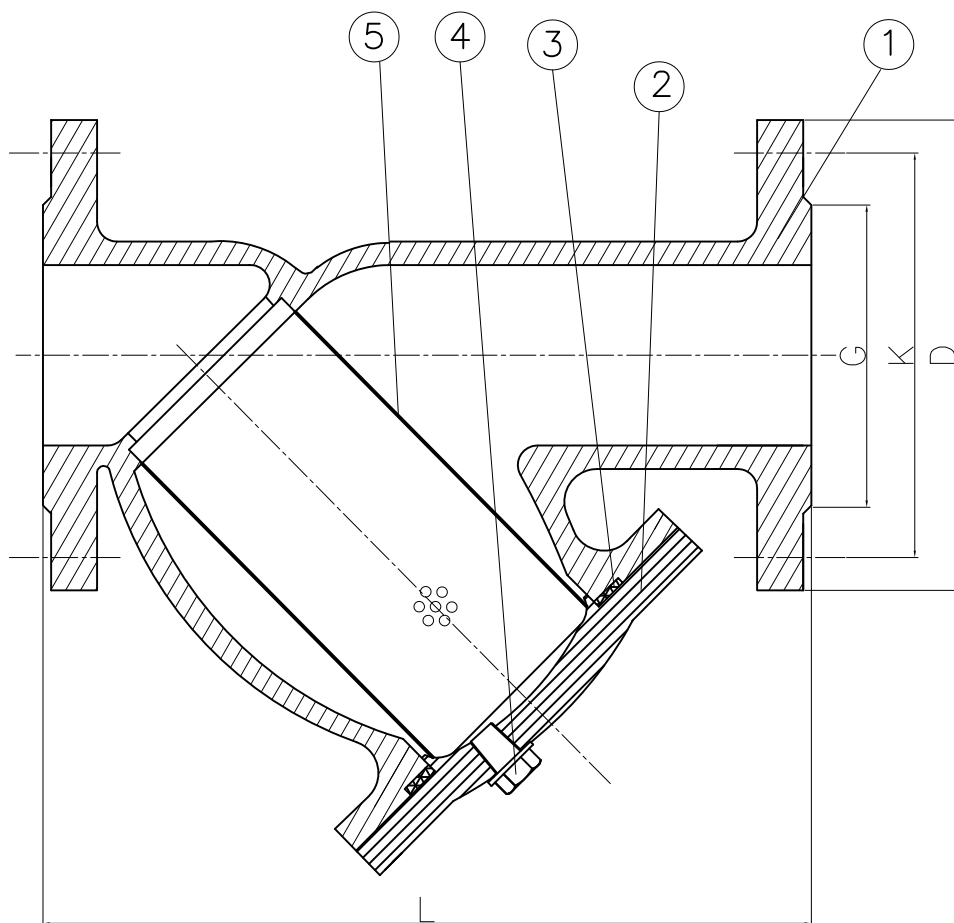

Nos.of hole	4	4	4	8	8	8	8	12	12
Dia.of hole	19	19	19	19	22	22	22	25	25
K	121	140	152	191	216	241	298	362	432
D	152	178	191	229	254	279	343	406	483
L	225	273	292	352	420	470	543	660	762
(mm)	2"	2½"	3"	4"	5"	6"	8"	10"	12"

5	Screen	Stainless steel
4	PLUG	carbon steel
3	Gasket	NBR
2	Cover	GG25
1	Body	GG25
No.	Parts	Material

Application:

- 1.Face to face is according to ANSIB16.1
- 2.Flange drilled is according to ANSI B16.5 16.47
- 3.Working temperature:0~80°C
- 4.Working pressure: 200PSI

APPROVED BY Danny Hsu	DRAWING BY FX	SCALE *	MATERIAL GG25	PARTS NAME	PART NO	REMARK	MODEL NO. Y STRAINER - 125LB
DATE 2010.03.26	CHECK BY	UNIT mm	PROJECT 	DESCRIPTION	DRAWING NO		DIE ERSTE Industry Co., Ltd.