


TAG NO. :

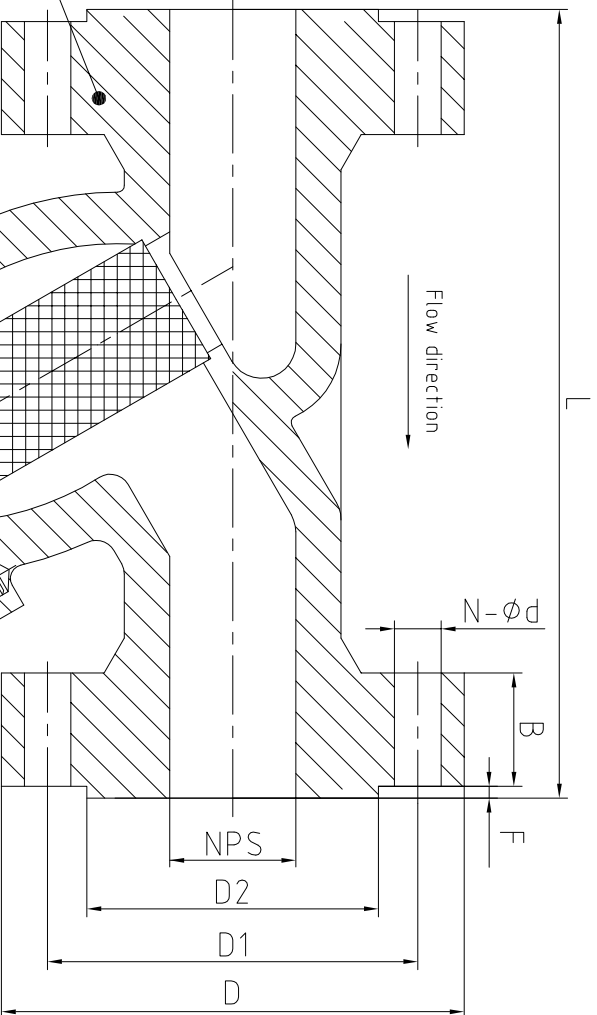

- 1. Flange dimension conforms as to: ASME B16.5 RF
Face finish 125-250 AARH
- 2. Testing standard as to: API 598
- 3. Face-To-Face dimension as to: MFR STD
- 4. Pressure-temperature conforms as to: ASME B16.34
- 5. Design & Manufacture as to: ASME B31.3
- 6. Drain plug shall be at the lowest possible position
- 7. Drain plug NPT threaded standard as to: ASME B1.20.1

I Nondestructive Testing			
1.1	Pressure Test	API 598	Yes
1.2	Chemical composition certification	Mandatory	Yes
1.3	Penetrant Test	All Body Surface	Yes
1.4	Magnetic particle testing	All Body Surface	Yes

Performance Standard			
Nominal Bore	NPS	2"~6"	
Nominal Pressure	Class	600LB	
Pressure Test			
Shell Test	15.0	Mpa	
Seal Test	/		
Backseat Test	/		
Air Test	0.6		
Working Temperature	-29°C ~ +425°C		
Suitable Medium	Water, Oil, Gas, Steam, etc		

SIZE	L	D	D1	D2	B	N-φd	F	H	C
2"	260	165	127	92	25.5	8-φ19	7	172	245
3"	360	210	168.3	127	32	8-φ22	7	238	340
4"	480	275	215.9	157.5	38.5	8-φ25.5	7	320	455
6"	480	355	292.1	216	48	12-φ29	7	330	468

7.	DRAIN PLUG	ASTM A105	1/2" WITH NPT END
6.	GASKET	SS316+GRAPHITE	
5.	COVER	ASTM A105	
4.	SCREEN	A276 SS316	MESH: 20
3.	NUT	A194, 2H	
2.	BOLT	A193 B7	
1.	BODY	A216 WCB	
NO.	NAME	MATERIAL	QTY
		REMARK	

Y TYPE STRAINER



NPS 2"~6" 600LB RF
Body: A216 WCB
Screen: SS316