


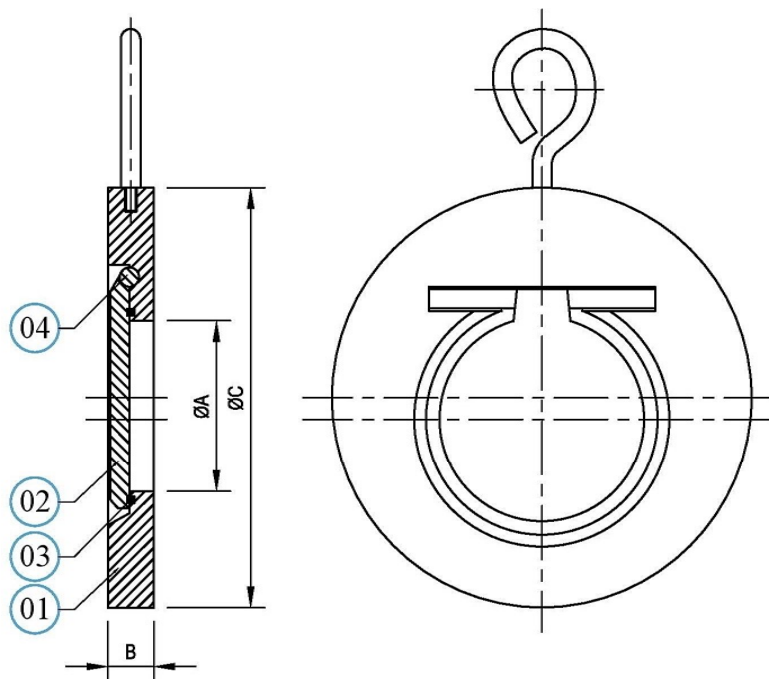

SR. NO.	DESCRIPTION	MATERIAL	QTY.
01	BODY	CAST IRON, CAST STEEL WCB 216GR, CF8, CF8M, CF3, CF3M, DUPLEX STEEL	1
02	DISC	C.S., CF8, CF8M, CF3, CF3M	1
03	'O' RING	NITRILE, EPDM, VITON, SILICON, PTFE	1
04	HINGE PIN	AISI 304, 316, M.S.	1

SPRING: S.S.304, S.S.316

PRIMARY SERVICE RATING & TEST PRESSURE			
CLASS	WORKING TEMP.	HYD. TEST PRESSURE	
		BODY	SEAT
150	20°C TO 180°C	32 kg/cm ²	22 kg/cm ²

SIZE	INCH	1"	1½"	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
	M.M.	25	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
DIMENSION	ØA	13	21	30	40	49	70	90	114	157	195	230	270	310	360	405	490
	B	19	19	19	19	19	19	19	19	29	29	38	44	51	60	64	70
	ØC	64	85	105	124	137	175	197	222	279	340	410	450	514	549	605	710

TOLERANCE :- +5MM

SUITABLE FOR				
STEAM	WATER	OIL	AIR	GASES
	●	●		

TECHNICAL DATA	
DESIGN & MANUFACTURING STD.	API 6D / ANSI B 16.34
TESTING & INSPECTION STD.	API 598
PRESSURE CLASS :	150#

CLIENT					
P.O./ENQ. No.					
DALSONS VALVES SANGLI	DRN:	CHKD:	APPD:	REV	DATE
	TITLE: WAFER TYPE CHECK VALVE				
	ALL DIMENSIONS ARE IN MM UNLESS SPECIFIED				
	SCALE N.T.S.	DWG.No. 001	SHEET 1 OF 1		