


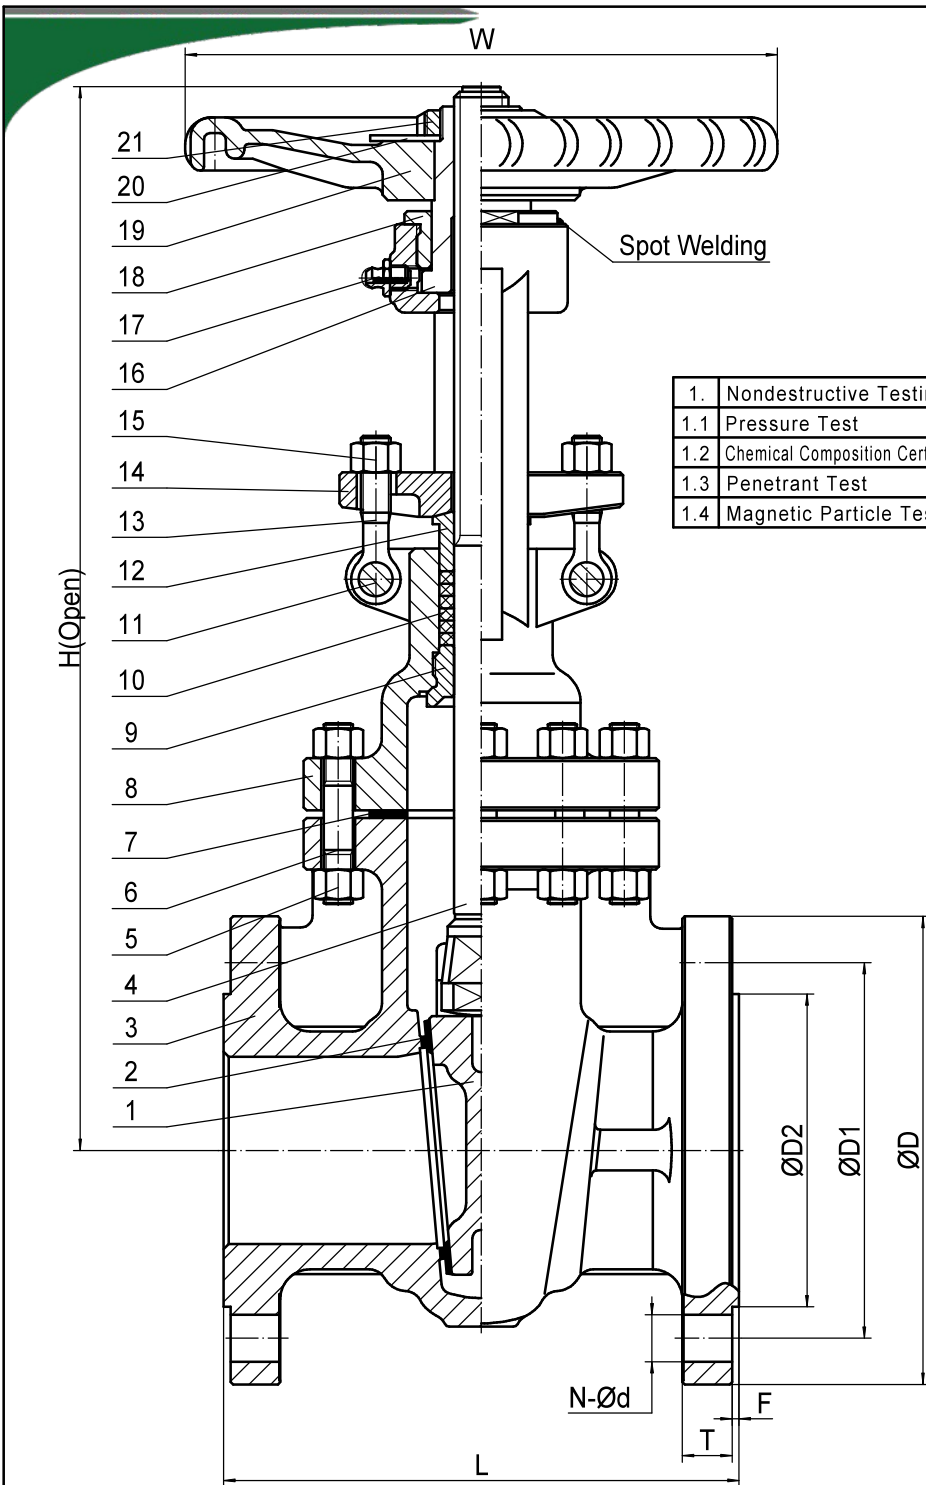

Technical Requirements

- 1.Design & manufacture as to:API 600
- 2.Face-to-face dimension standard as to:ASME B16.10
- 3.Flange dimension conforms as to:ASME B16.5
- 4.Testing & Inspection as to:API 598
- 5.Pressure-temperature conforms as to: ASME B16.34
- 6.Corrosion resistance standard conforms as to: NACE MR-01-75
- 7.Visual Examination conforms as to: 100% MSS SP-55

1.	Nondestructive Testing		
1.1	Pressure Test	Mandatory	Yes
1.2	Chemical Composition Certification (PMI)	Mandatory	Yes
1.3	Penetrant Test	Mandatory	Yes
1.4	Magnetic Particle Test	Mandatory	Yes

PTV[®]
Solutions

Performance Standard

Nominal Bore	NPS	"8~"1
Nominal Pressure	Class	150 LB

Pressure Test

Shell Test	3.0	Mpa
Seal Test	2.2	
Backseat Test	2.2	
Air Test	0.6	
Working Temperature	-29°C ~ +425°C	
Suitable Medium	Water. Oil. Gas. Steam. etc	

Size		Outline		Flange Size						
NPS	DN	L	H	ØW	ØD	ØD1	ØD2	N-Ød	T	F
1"	25	127	235	Ø150	Ø110	Ø79.4	Ø51	4-Ø16	13	2
1 1/2"	40	165	298	Ø180	Ø125	Ø98.4	Ø73	4-Ø16	16	2
2"	50	178	323	Ø200	Ø150	Ø120.7	Ø92	4-Ø19	17.5	2
2 1/2"	65	191	355	Ø200	Ø180	Ø139.7	Ø105	4-Ø19	21	2
3"	80	203	383	Ø250	Ø190	Ø152.4	Ø127	4-Ø19	22.5	2
4"	100	229	457	Ø300	Ø230	Ø190.5	Ø157	8-Ø19	22.5	2
5"	125	254	632	Ø300	Ø255	Ø215.9	Ø186	8-Ø22	22.5	2
6"	150	267	635	Ø300	Ø280	Ø241.3	Ø216	8-Ø22	24	2
8"	200	292	762	Ø350	Ø345	Ø298.5	Ø270	8-Ø22	27	2

21	Locking Nut	A194 8M	
20	Nameplate	SS304	
19	Handwheel	A47	
18	Locking Nut	A194 8M	
17	Sealant Injection	Brass	
16	Stem Nut	Brass	
15	Nut	A194 8M	
14	Packing Gland	A351 CF3M	
13	Packing Bushing	A182 F316	
12	Eye-Bolt	A193 B8M	
11	Pin	SS316L	
10	Packing	Graphite	
9	Back Seat	SS316L	
8	Bonnet	A351 CF3M	
7	Gasket Seal	SS316L+Graphite	
6	Bolt	A193 B8M	
5	Nut	A194 8M	
4	Stem	A182 F316L	
3	Body	A351 CF3M	
2	Seat	SS316L	
1	Wedge	A351 CF3M	

No.	Name	Material	Remark
-----	------	----------	--------

TAG NO.:

PTV[®]
Solutions

Design		Approve		Graphics	Genral View
Technics		Date		Describe	Gate Valve OS&Y
Check				Model	NPS 1"~8" Class 150LB RF SS316L