


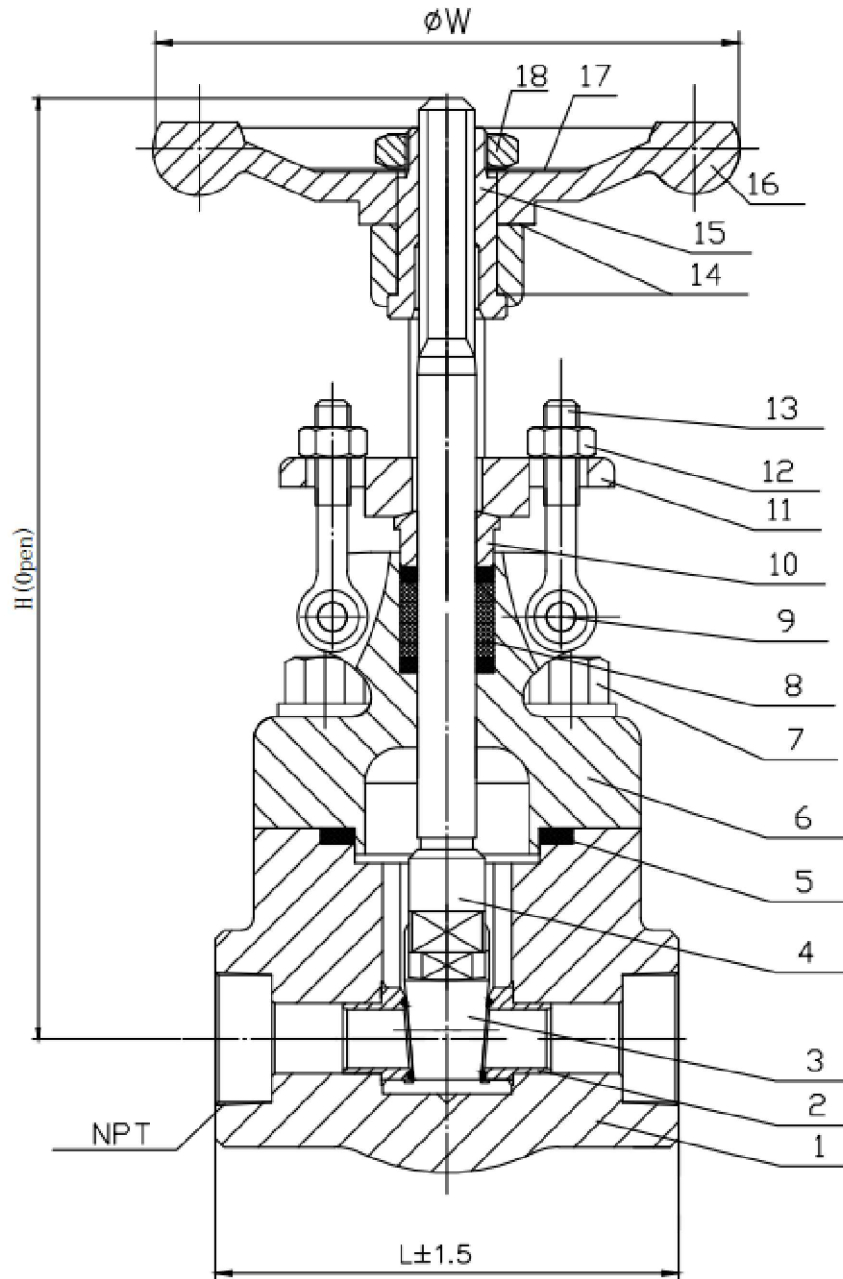

Technical Specification :

1.Design and manufacture : API 602

2.Socket welding dimension : ANSI B1 20.1

4. Inspection and test : API 598

Performance Specification

Nominal pressure		800LB	
Test Pre- ssure	Shell test	21.0	MPa
	Tightness test	15.2	
	Gas-Tightness test	0.6	
Max. working temperature		500℃	
Applicable medium : Water、Oil、Gas、acid			

GATE VALVE CLASS800

SIZE	L	H	W
1/2"	73	144	100
3/4"	80	155	100
1"	100	180	125
1 1/4"	114	216	160
1 1/2"	120	234	160
2"	130	270	180

MAIN PARTS AND MATERIALS

9	Pin	316	18	Nut	1035
8	Packing	Graphite	17	Name Plate	LY12
7	Bolt	B8M	16	Handwheel	A197
6	Bonnet	F316	15	Stem Nut	A276 410
5	Gasket	316+Graphite	14	Gasket	A240 410
4	Stem	F316	13	Bolt	B8M
3	Wedge	F316	12	Nut	316
2	Seat	F316	11	Gland Flange	316
1	Body	F316	10	Gland	316
NO Part name		Material	NO Part name		Material
			图样标记	重量	单位
					mm
			参考标准		1:1
			名称	800LB Gate Valve	
标记	处数	更改文件号	签字	日期	
设计			审核		
校对			标准化		
工艺			批准		
画法			日期		



青島英利機械有限公司

QINGDAO YINGLI MACHINERY CO., LTD

共 頁 第 頁