


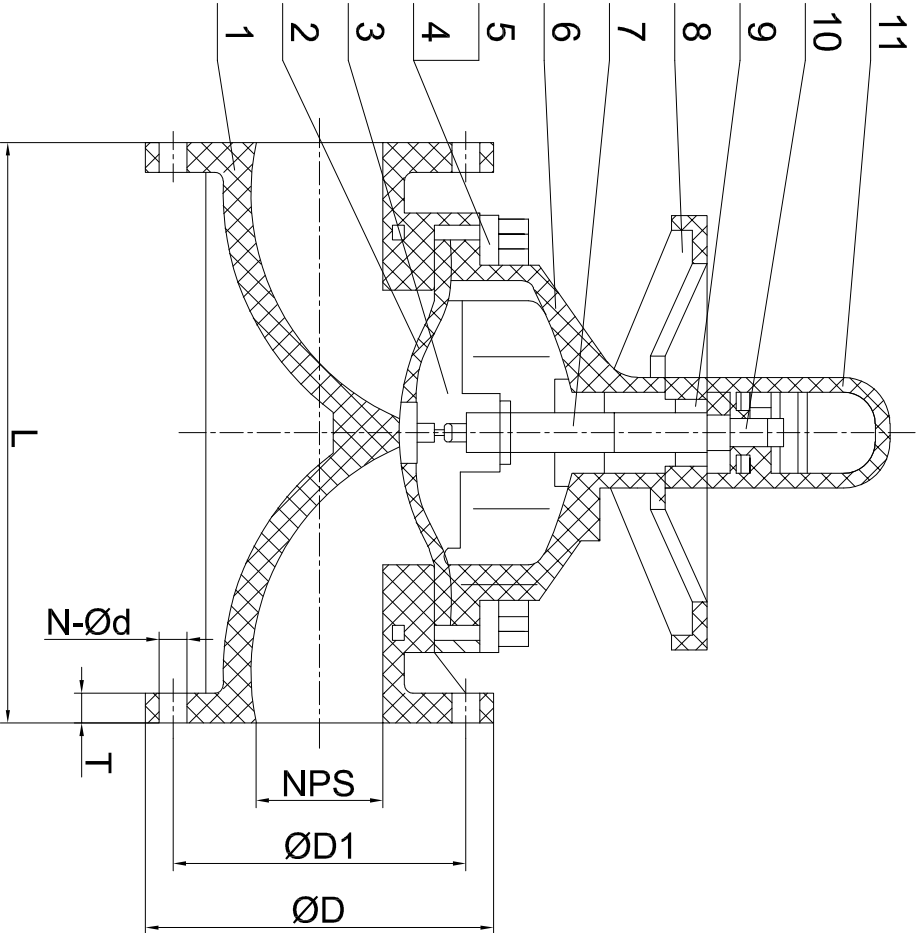

NPS	L	ØD	ØD1	N-Ød	T
1"	130	Ø125	Ø79.4	4-Ø16	16
1 1/4"	160	Ø135	Ø88.9	4-Ø16	16
1 1/2"	180	Ø145	Ø98.4	4-Ø16	16
2"	210	Ø160	Ø120.7	4-Ø19	18
2 1/2"	250	Ø180	Ø139.7	4-Ø19	22
3"	280	Ø195	Ø152.4	4-Ø19	25
4"	340	Ø220	Ø190.5	8-Ø19	25
5"	405	Ø255	Ø215.9	8-Ø22	30
6"	460	Ø280	Ø241.3	8-Ø22	30
8"	575	Ø340	Ø298.5	8-Ø22	38

Performance Standard			
Nominal Bore	NPS	1"~8"	
Nominal Pressure	Class	150LB	

Pressure Test			
Sheel Test	1.50	Mpa	
Seal Test	1.10		
Backseat Test	/		
Air Test	0.60		
Working Temperature	-29℃ ~ +110℃		
Suitable Medium	Liquid, Oil, Gas. etc		

Technical Requirements

- 1. Height dimension (H) standard as to: MFR-STD
- 2. Design & Manufacture as to: Q/BLSJ008-2003
- 3. Flange dimension conforms as to: ASME B16.5
- 4. Testing & Inspection as to: Q/BLSJ008-2003

11	Cap	PC
10	Position Indicator Nut	SS
9	Stem Nut	Brass
8	Handwheel	ABS
7	Stem	A276 SS410
6	Bonnet	PVDF
5	Nut	A194 8M
4	Bolt	A193 B8M
3	Disc	PVDF
2	Diaphragm	PTFE Backed EPDM
1	Body	PVDF
No.	Part Name	Material
	PVDF Diaphragm Valve	
	PTV® Solutions	
	NPS 1"~8" Class 150LB	
	Body: PVDF	
	Diaphragm: PTFE Backed EPDM	
	Drawing No.:	