


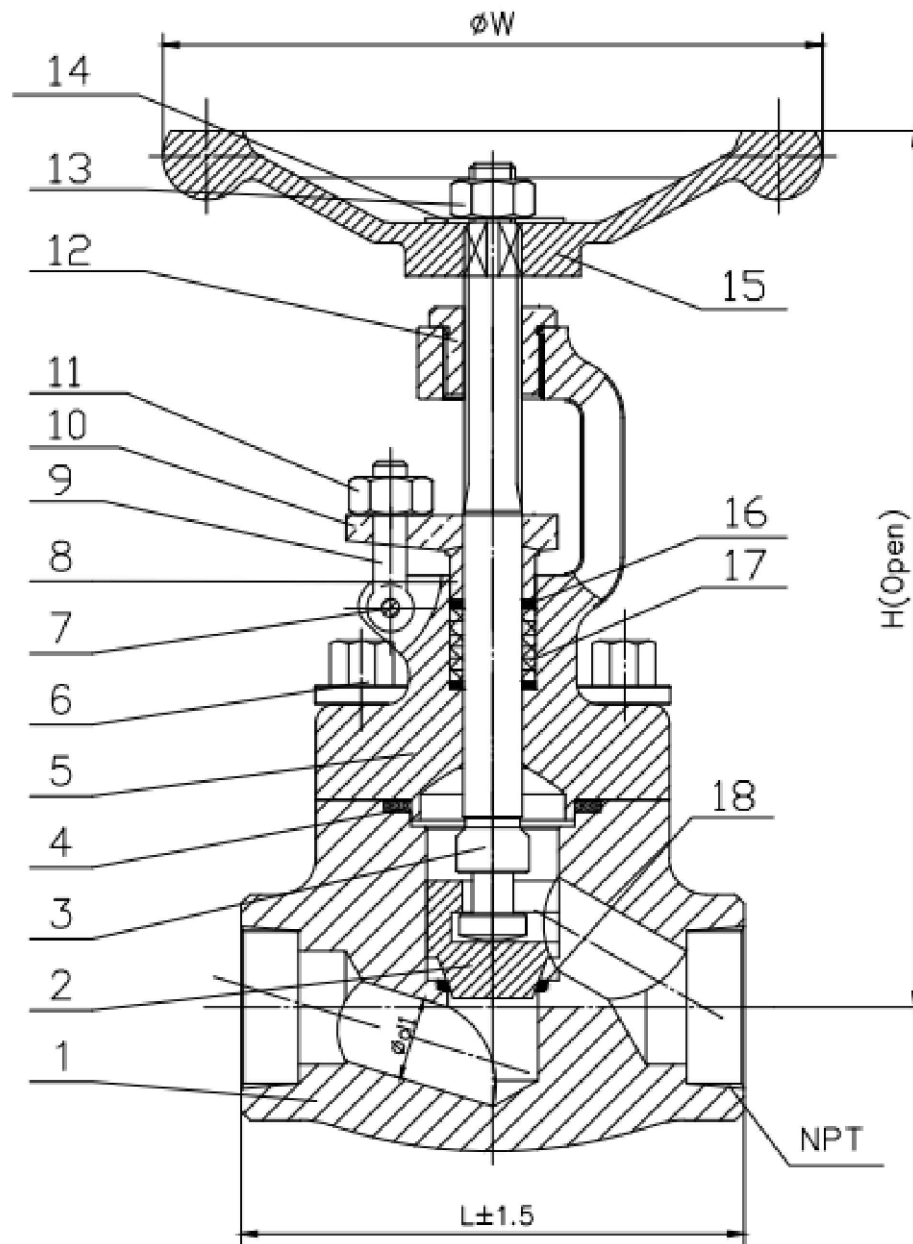

Technical Specification :

1.Design and manufacture : API 602

2.Socket welding dimension : ANSI B1 20.1

4. Inspection and test : API 598

Performance Specification

Nominal pressure		800LB	
Test Pre- ssure	Shell test	21.0	MPa
	Tightness test	15.4	
	Gas-Tightness test	0.6	
Max. working temperature		425℃	
Applicable medium : Water、Oil、Gas、acid			

GLOBE VALVE CLASS800

SIZE	L	H	W	d1
1/2"	73	152	100	11
3/4"	80	158	100	13
1"	100	195	125	17
1 1/4"	114	226	160	22
1 1/2"	145	238	160	28
2"	160	286	180	33

MAIN PARTS AND MATERIALS

9	Gland eyeboltt	B8M	18	Seat	316
8	Gland	316	17	Packing	Graphite
7	Pin	316	16	Packing	Graphite
6	Bolt	B8M	15	Handwhell	A197
5	Bonnet	316	14	Name Plate	LY12
4	Gasket	316+Graphite	13	Nut	A194 2H
3	Stem	316	12	Tesm Nut	A276 410
2	Disc	316	11	Nut	316
1	Body	316	10	Gland Flange	316
NO Part name		Material	NO Part name		Material
			图样标记	重量	单位
					mm
			比例		1:1
			参考标准		
			名称	GLOBE Valve	
标记	处数	更改文件号	签字	日期	
设计			审核		
校对			标准化		
工艺			批准		
画法			日期		



青島英利機械有限公司

QINGDAO YINGLI MACHINERY CO., LTD

共 頁 第 頁