


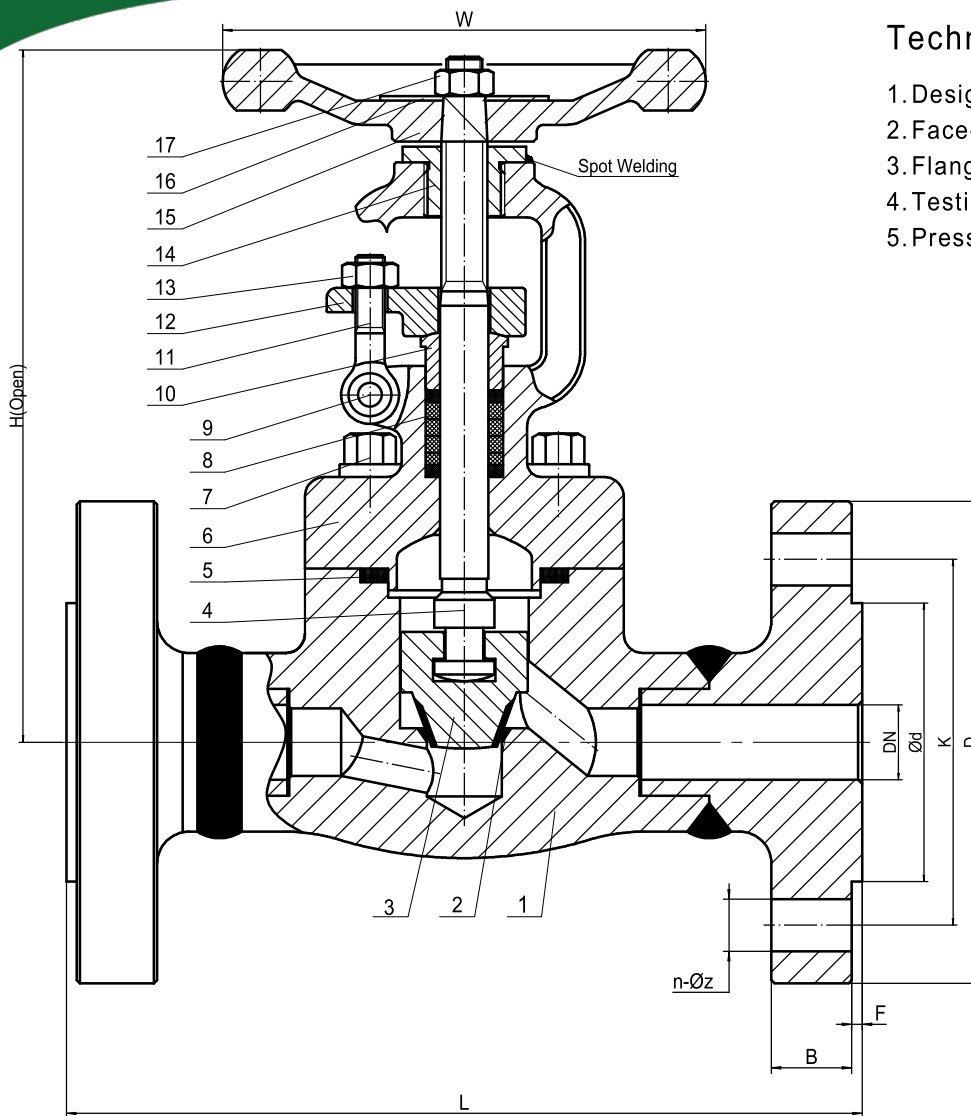

Technical Requirements

- 1.Design & manufacture as to: API 602
- 2.Face-to-face dimension standard as to: ASME B16.10
- 3.Flange dimension conforms as to: ASME B16.5
- 4.Testing record as to: API 598
- 5.Pressure-temperature conforms as to: ASME B16.34

Performance Standard

Nominal Bore	1/2"~2"	NPS
Nominal Pressure	150	LB
Pressure test		
Shell Test	3.0	MPa
Seal Test	2.2	
Backseat test	2.2	
Air Test	0.6	
Working Temperature	-29°C	+425°C
Suitable Medium	Water.Oil.Gas.Steam.etc	

1.	Nondestructive Testing		
1.1	Pressure Test	Mandatory	Yes
1.2	Chemical Composition Certification (PMI)	Mandatory	Yes
1.3	Penetrant Test	Mandatory	Yes
1.4	Magnetic Particle Test	Mandatory	Yes

17	Locking Nut	A194 2H	
16	Nameplate	SS304	
15	Handwheel	A47	
14	Stem Nuts	13Cr	
13	Nuts	A194 2H	
12	Packing Gland	ASTM A105	
11	Eye-Bolt	A193 B7	
10	Gland Bushing	13Cr	
9	Pin	13Cr	
8	Packing	Graphite	
7	Bolt	A193 B7	
6	Bonnet	ASTM A105	
5	Gasket Seal	SS304+Graphite	
4	Stem	A182 F6a	
3	Wedge	13Cr	
2	Seat	13Cr+Stellite.6	
1	Body	ASTM A105	

Size		Bore	Outline			Flange Size					
in	DN	d	L	H	W	D	K	Ød	n-Øz	B	F
1/2"	15	10	108	190	100	90	60.3	35	4-Ø16	10	2
3/4"	20	12.7	117	195	100	100	69.9	43	4-Ø16	11.5	2
1"	25	17.5	127	230	125	110	79.4	51	4-Ø16	13	2
1 1/4"	32	23	140	245	160	115	88.9	64	4-Ø16	14.5	2
1 1/2"	40	28	165	262	160	125	98.4	73	4-Ø16	16	2
2"	50	33	203	300	180	150	120.7	92	4-Ø19	17.5	2

No.	Name	Material	Remark
TAG NO.			
Design		Approve	
Technics		Date	
Check			
Graphics	Genral View		
Describe	Globe Valve		
Model	NPS 1/2"~2" Class 150LB RF Trim:08#		

PTV
Solutions