

The SE201 voice siren is an all-in-one sensor: siren, voice alert, temperature sensor. Temperature sensor detect every 5 minutes, and it will generate trigger command when the gap of temperature is over 2°C. It also has auto-report function to monitor battery condition. Its great compatibility with our U-Net family security products makes it suitable for smart home cloud based platforms.

Main Features

- All-in-one: siren + voice alert + temperature sensor
- Superior audio quality
- Smart: auto-report battery condition every hour
- Easy: auto-binding
- Safe: tamper switch
- Temperature change notification (gap: 2°C)
- Keep alive report





Brief Product Specifications

Function	Indoor siren
RF protocol	U-Net 5.0
RF band	868.0-868.6 MHz(EU)
	902.0-925.0 MHz(US)
RF range (open space)	Up to 1000m
Alarm sound	110dB
Voice sound	85dB

Battery life	4 year
Battery type	LR14 x 4
Operation temperature	-10 ~ 40°C
Operation humidity	85% RH max
Dimension (mm)	44(W) x 58(D) x 200(H)
Weight	506g

Note: The actual battery life may be different by product settings, usage patterns and operating environment



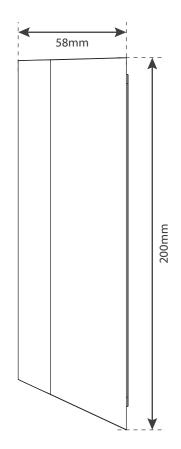



Copyright ©1980-2020 Everspring Industry Co., Ltd. All rights reserved. The Everspring name and logo are registered trademarks of Everspring Industry Co., Ltd. All other trademarks and brand names are the property of their respective owners. Everspring reserves the right to revise product specifications and literature at any time without prior notice to any party.

Confidentiality Statement

The purpose of this document is to provide general information about a product or products of Everspring Industry Co., Ltd. All information contained in this document is the confidential property of Everspring Industry Co., Ltd. Except where expressly authorized by Everspring Industry Co., Ltd., alteration, reproduction, redistribution, or transmission of this document by any means is strictly prohibited.