
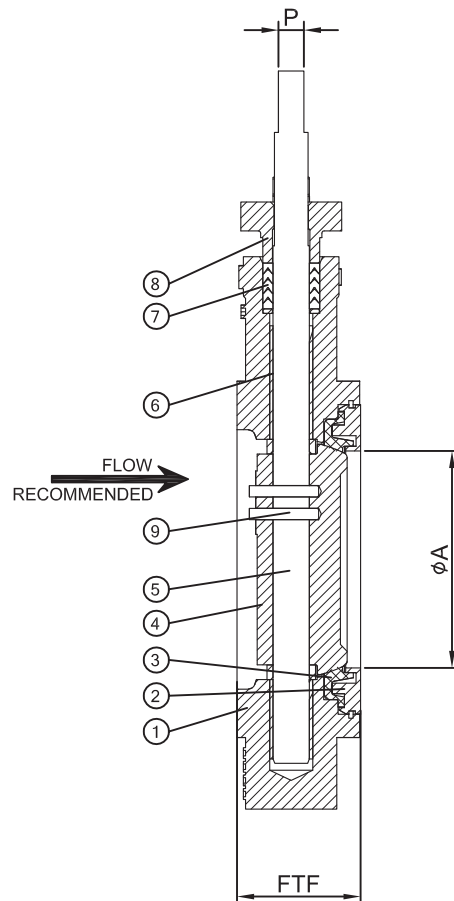


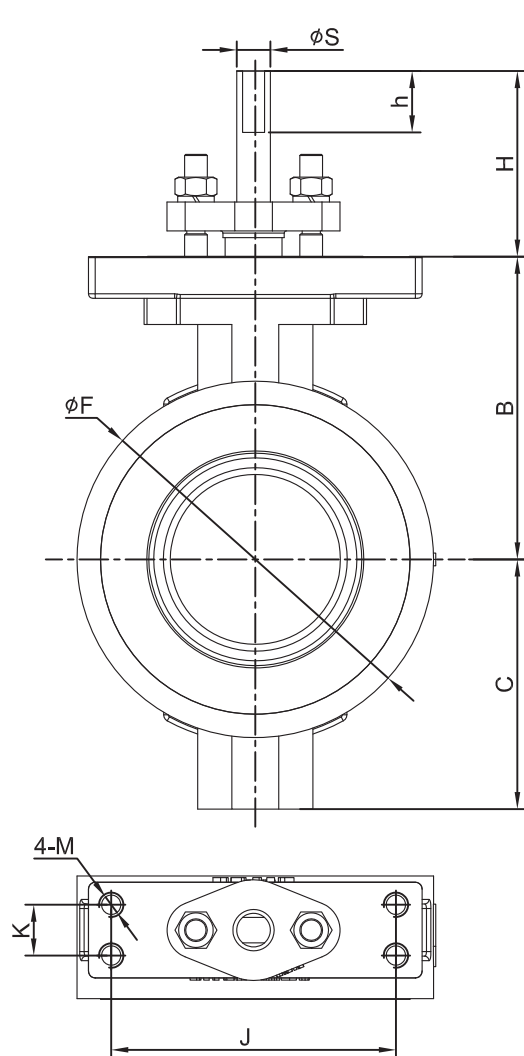

Place a tick in the appropriate box which material you require
Other materials tick the "other" column and remark.

No	Partname	☐ A	☐ B	☐ C	☐ D	☐ E	☐ Other
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
8	Cover	WCB	WCB	CF8	CF8M	CF3M	
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
6	Sleeve	316L+RPTFE					
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
4	Disc	CF8	CF8M	CF8	CF8M	CF3M	
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
2	Insert	A105	A105	F304	F316	F316L	
1	Body	WCB	WCB	CF8	CF8M	CF3M	

Data		Technology standard	
Pressure	Class 300	Design & manufacturing standards	API609
Size	2"~ 8"	Temperature & pressure standards	ASME B16.34
Type	Wafer	Inspection & test	API598
Temperature	-30℃~180℃	Flange size	ASME B16.5B16.47A
Leakage	VI FCI70-2	Note:	

NPS	ϕA	B	C	ϕF	$FTF \pm 3.3$	H	h	P	ϕS	J	K	M
2"	38	81	70	102	44	42.5	14	7	10	125.4	22.4	M10
2.5"	59	111	82	118	48	82	27	11.2	14.8	125.4	22.4	M10
3"	73	120	93	132	48	82	27	11.2	14.8	125.4	22.4	M10
4"	96	133	110	157	54	82	27	11.2	14.8	125.4	22.4	M10
5"	111	135	120	186	57	82	27	11.2	14.8	125.4	22.4	M10
6"	142	174	153	217	59	82	27	15.9	21.9	125.4	22.4	M10
8"	188	212	180	273	73	95	28	20.6	28	142.7	37.3	M12

die erste® DIE ERSTE INDUSTRY CO., LTD,
TAICHANG, TAIWAN

DRAWN BY:
Michelle
2023-03-29

REVIEW BY:

APPROVAL:

TITLE: Wafer HP Bfly valve CF8M,
RPTFE, Class 300,
2"~8"

DWG. NO.

REV: 1.0

UNIT: mm
DO NOT SCALE

Sheet: 1 of 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF 《DIE ERSTE INDUSTRY CO., LTD.》. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF 《DIE ERSTE INDUSTRY CO.,LTD.》 IS PROHIBITED.